

Angle Seat Valve(Piston Valve) Series PV600 (Gunmetal Body)

2/2-way Angle-Seat Valve Pneumatically Operated, for medium up to +180° C, Gunmetal Body female thread, port connection DN 15 - 65

- High flow rate;
- Long life cycle;
- NC and NO universal actuators with modular universal accessory program up to control heads;
- Deliverable with flow direction below or above seat
- Simple conversion of the circuit function.

◆ How to Order



PV600P032NCS



PV600P040NCS

◆

PV600 P 015 NC S x 63mm

Acting type	
S	Single acting
D	Double acting

Type of actuation	
NO	Normally Open
NC	Normally Closed (standard)

Nominal diameter			
15	G1/2	20	G3/4
25	G1	32	G1 1/4
40	G1 1/2	50	G2
65	G2 1/2		

Actuator Material code	
P	PA Actuator

Model	
PV600	600 series Angle Seat Valve

◆ Actuator Size

Port Size	Standard Actuator Size mm
	PA
DN15	40,50
DN20	50,63,80
DN25	50,63,80
DN32	63,80
DN40	63,80
DN50	63,80
DN65	80,100

- ◆ PV600 Series Plunger Pilot angle seat valve is propelled by a piston actuator, either single acting or double acting. 2/2 Way gunmetal valve body with big flow capacity V type seals ensure reliable and effective sealing Maintenance free, compatible with various accessories, Direction indicating, stroke limiting or manual switching can be achieved conveniently. Easy to install and maintain;


- ◆ The specific gunmetal material fuses zinc as a key element, which makes our valves applicable in high air tightness industry and highly resistant to corrosion in air, sea water, fresh water and steam.

Angle Seat Valve(Piston Valve) Series PV600 (Gunmetal Body)

◆ Specifications

Model Specification	Normally Closed	P015NC	P020NC	P025NC	P032NC	P040NC	P050NC	P065NC
	Normally Open	P015NO	P020NO	P025NO	P032NO	P040NO	P050NO	P065NO
Material of body / Actuator	Gunmetal Body/PA							
Operating Method	Plunger Pilot							
Ambient and fluid	Air,Water,Oil,Steam (50CTS Bellow)							
Port size	G1/2	G3/4	G1	G1 1/4	G1 1/2	G2	G2 1/2	
Nominal Diameter mm	13	20	25	32	40	50	65	
Kv (m ³ /h)	4.2	8	19	27.5	42	55	90	
Seat seal	PTFE/FPM							
Stem seal	PTFE/FPM							
Piston Seal	PTFE/FPM/NBR							

◆ Dimensions [mm]

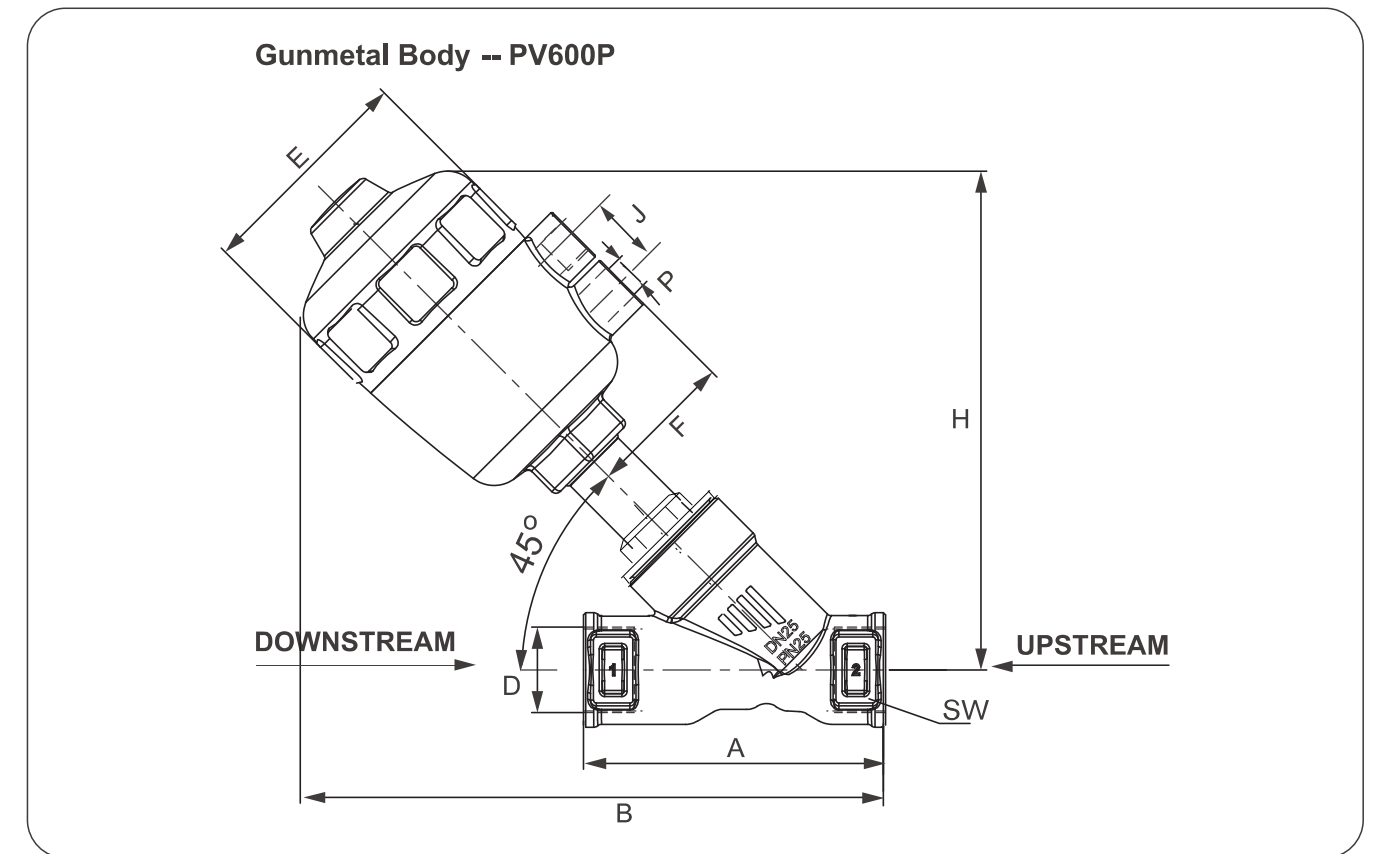

Port Size	DN (mm)	Actuator (mm)	A	B	D	E	F	H	P	J	SW
1/2"	DN15	40	88	139	G1/2	30	53	115	G1/8	20	27
		50	88	163	G1/2	44	64	140	G1/4	24	27
3/4"	DN20	50	96	171	G3/4	44	64	144	G1/4	24	34
1"	DN25	50	108	181	G1	44	64	152	G1/4	24	41
		63	108	206	G1	54	80	177	G1/4	24	41
1-1/4"	DN32	63	112	219	G1-1/4	54	80	183	G1/4	24	50
1-1/2"	DN40	63	133	222	G1-1/2	54	80	188	G1/4	24	55
2"	DN50	63	154	249	G2	54	80	204	G1/4	24	70
		80	154	270	G2	62	101	225	G1/4	24	70
2-1/2"	DN65	80	191	275	G2-1/2	62	101	239	G1/4	24	85